

IT-B9

SERVICE MANUAL


*Canadian Model
E Model*



Photo : Gray type

SPECIFICATIONS

3-2. SCHEMATIC DIAGRAM • Refer to page 9 for IC Block Diagrams.

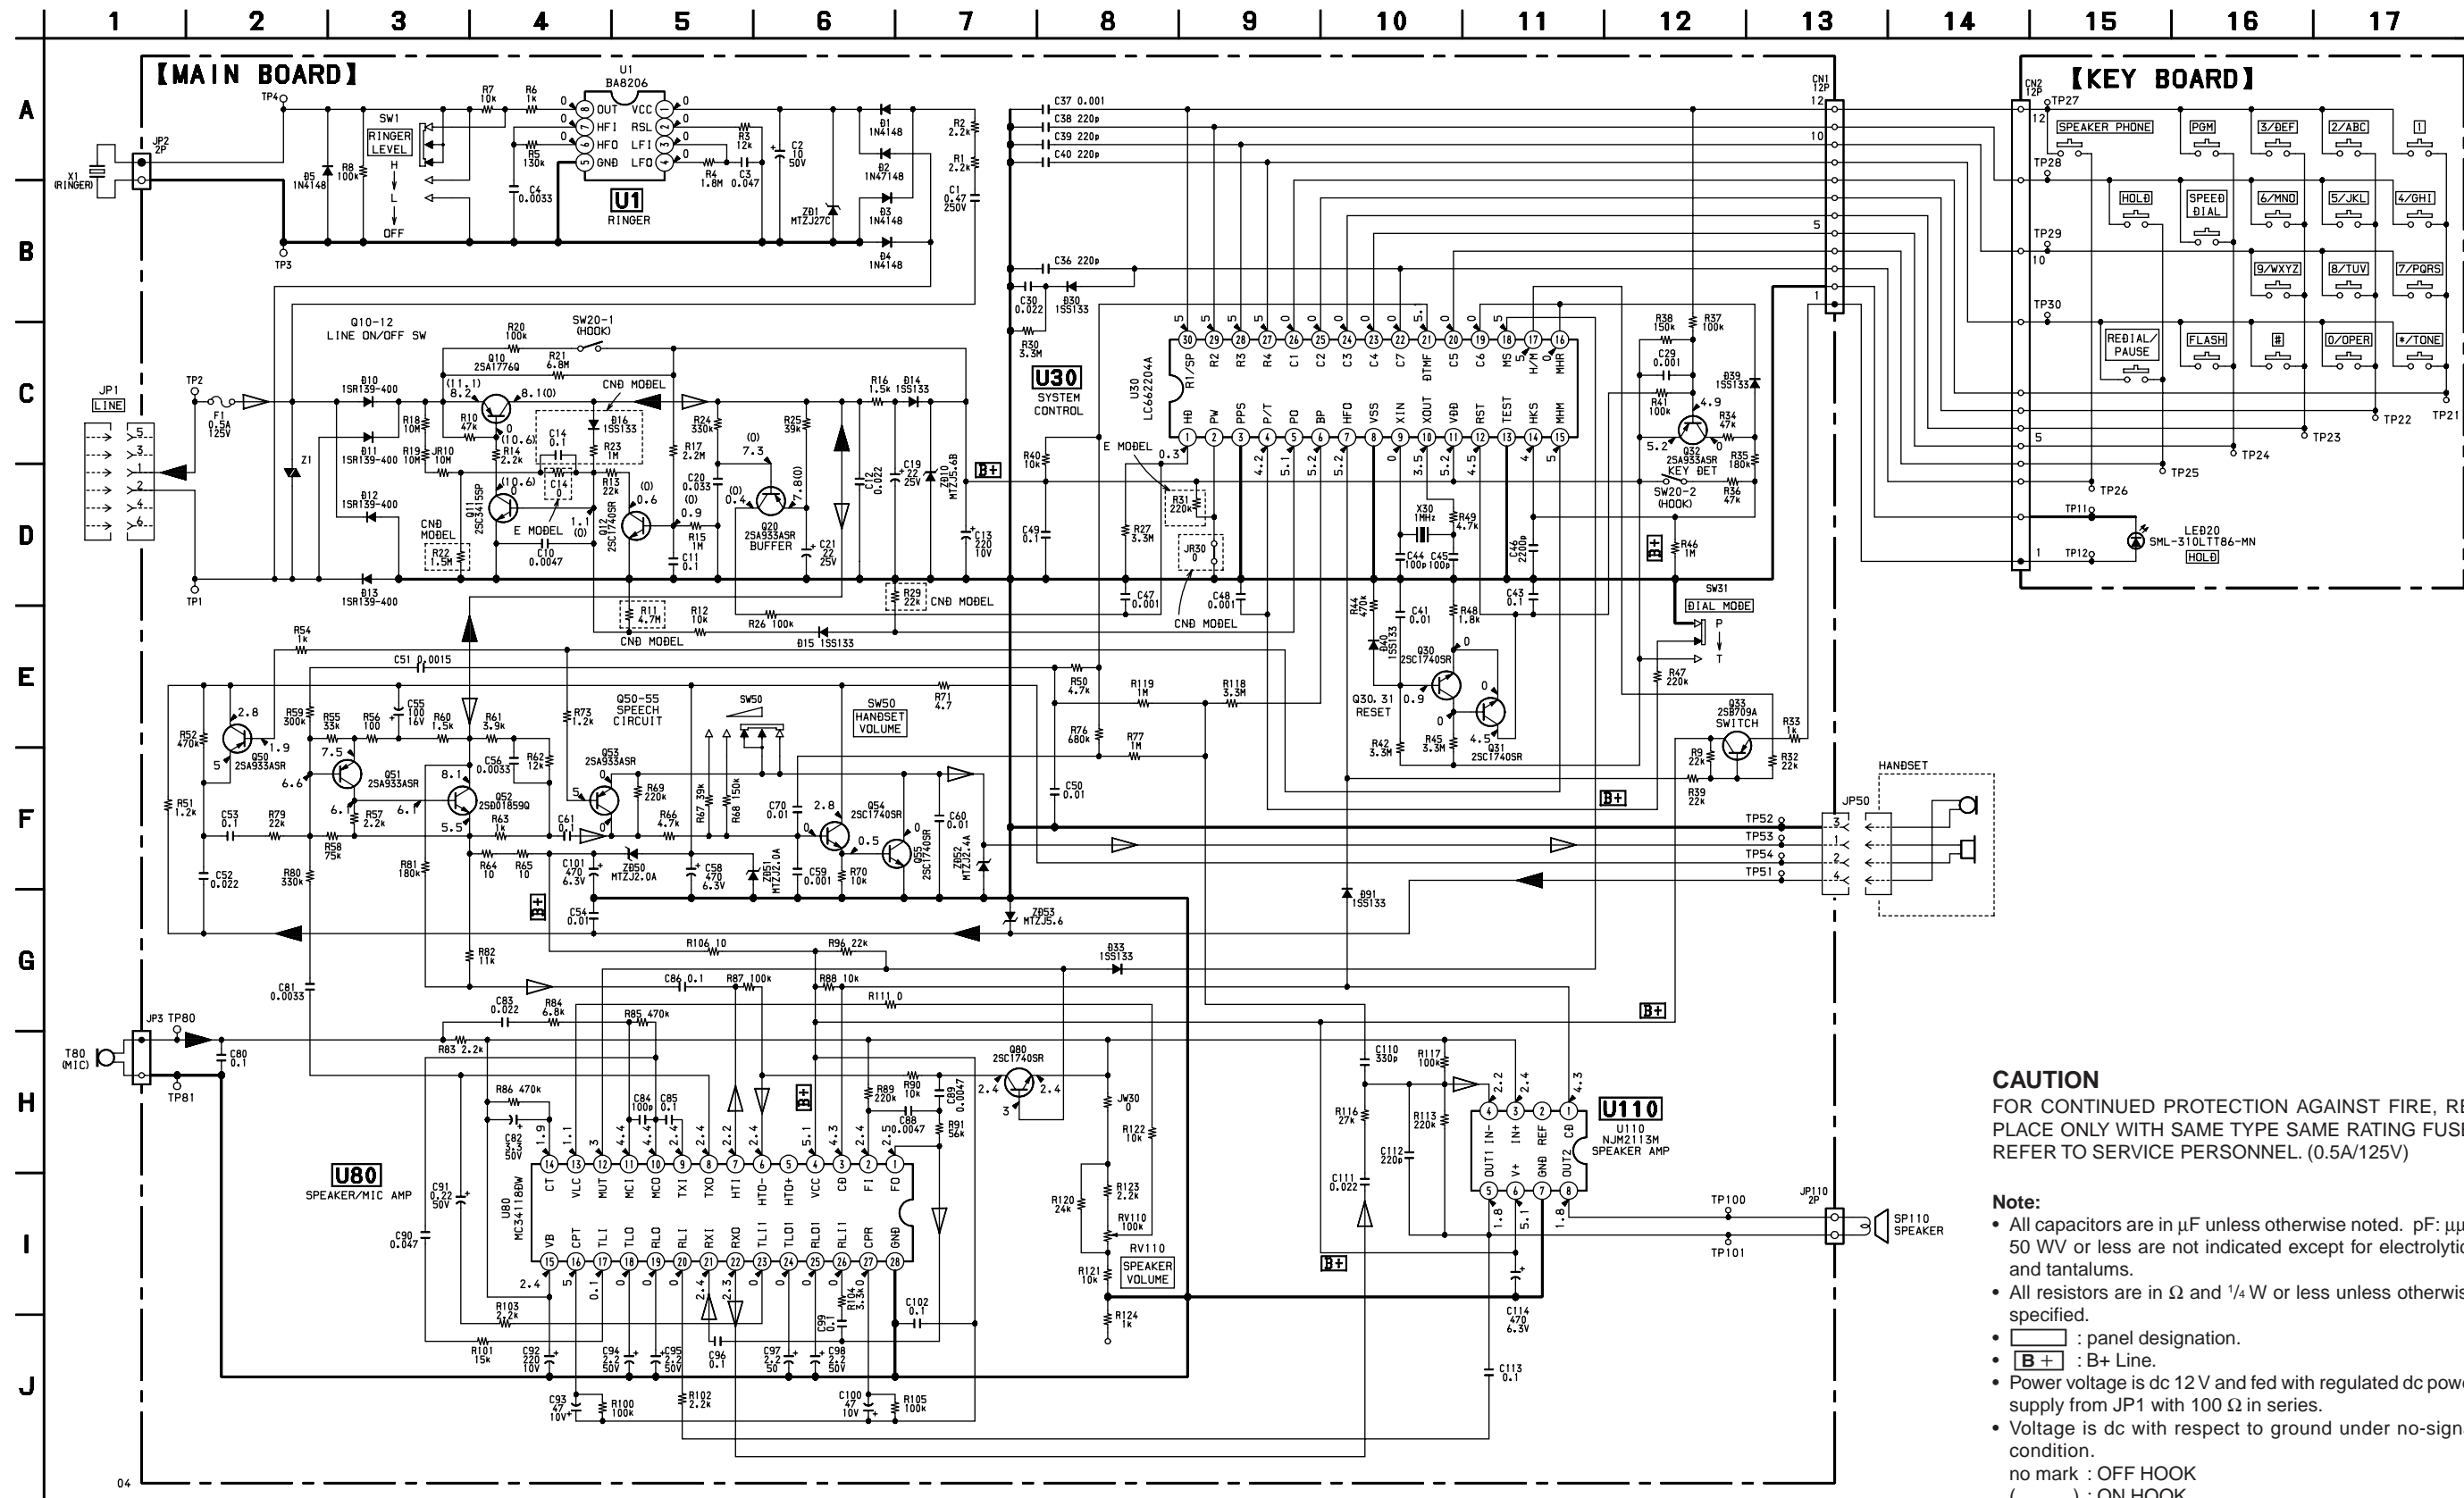

CAUTION
 FOR CONTINUED PROTECTION AGAINST FIRE, REPLACE ONLY WITH SAME TYPE SAME RATING FUSE. REFER TO SERVICE PERSONNEL. (0.5A/125V)

- Note:**
- All capacitors are in μF unless otherwise noted. pF: μpF 50 WV or less are not indicated except for electrolytics and tantalums.
 - All resistors are in Ω and $1/4$ W or less unless otherwise specified.
 - : panel designation.
 - B+ : B+ Line.
 - Power voltage is dc 12 V and fed with regulated dc power supply from JP1 with 100 Ω in series.
 - Voltage is dc with respect to ground under no-signal condition.
 - no mark : OFF HOOK
 () : ON HOOK
 - Voltages are taken with a VOM (Input impedance 10 M Ω). Voltage variations may be noted due to normal production tolerances.
 - Signal path.
 - ▷ : RX
 ◀ : TX
 - Abbreviation
 CND : Canadian model.